

10/20/00

10/20/00 U.S. PTO

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

for new nonprovisional applications under 37 CFR 1.53(b)

Attorney Docket No.	198707US-0X CONT
First Inventor or Application Identifier	Johannes KRUL
Title	SUBSTRATE WHICH IS MADE FROM PAPER AND IS PROVIDED WITH AN INTEGRATED CIRCUIT

APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
<p>1. <input checked="" type="checkbox"/> Fee Transmittal Form (e.g. PTO/SB/17) (Submit an original and a duplicate for fee processing)</p> <p>2. <input checked="" type="checkbox"/> Specification Total Pages 15</p> <p>3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) Total Sheets 2</p> <p>4. <input type="checkbox"/> Oath or Declaration Total Pages <input type="text"/> a. <input type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. §1.63(d)) (for continuation/divisional with box 15 completed) i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §1.63(d)(2) and 1.33(b).</p> <p>5. <input checked="" type="checkbox"/> Incorporation By Reference The entire disclosure of the prior application is considered to be part of the disclosure of the accompanying application and is hereby incorporated by reference therein.</p>	ACCOMPANYING APPLICATION PARTS <p>6. <input type="checkbox"/> Assignment Papers (cover sheet & documents)</p> <p>7. <input type="checkbox"/> 37 C.F.R. §3.73(b) Statement (when there is an assignee) <input type="checkbox"/> Power of Attorney</p> <p>8. <input type="checkbox"/> English Translation Document (if applicable)</p> <p>9. <input checked="" type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input checked="" type="checkbox"/> Copies of IDS Citations (11)</p> <p>10. <input checked="" type="checkbox"/> Preliminary Amendment</p> <p>11. <input checked="" type="checkbox"/> White Advance Serial No. Postcard</p> <p>12. <input type="checkbox"/> Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application. Status still proper and desired.</p> <p>13. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)</p> <p>14. <input checked="" type="checkbox"/> Other: Request for Priority List of Names International Search Report</p>
<p>15. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below:</p> <p><input checked="" type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input type="checkbox"/> Continuation-in-part (CIP) of prior international PCT application no.: PCT/NL99/00220</p> <p>Prior application information: Examiner: Group Art Unit:</p>	
<p>16. Amend the specification by inserting before the first line the sentence:</p> <p><input checked="" type="checkbox"/> This application is a <input checked="" type="checkbox"/> Continuation <input type="checkbox"/> Division <input type="checkbox"/> Continuation-in-part (CIP) of international PCT application no. PCT/NL99/00220 Filed on April 15, 1999, pending</p> <p><input type="checkbox"/> This application claims priority of provisional application Serial No. Filed</p>	
<p>17. CORRESPONDENCE ADDRESS</p> <p>(703) 413-3000 FACSIMILE: (703) 413-2220 22850</p>	

Name:	Norman F. Oblon	Registration No.:	24,618
Signature:		Date:	October 20, 2000
Name:	William E. Beaumont	Registration No.:	30,996

Docket No. 198707US-0X CONT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

INVENTOR(S) Johannes KRUL ET AL

SERIAL NO: New Application

FILING DATE: Herewith

FOR: SUBSTRATE WHICH IS MADE FROM PAPER AND IS PROVIDED WITH AN INTEGRATED CIRCUIT

JC931 U.S. PTO
09/692371
10/20/00

FEE TRANSMITTAL


ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

FOR	NUMBER FILED	NUMBER EXTRA	RATE	CALCULATIONS
TOTAL CLAIMS	25 - 20 =	5	× \$18 =	\$90.00
INDEPENDENT CLAIMS	3 - 3 =	0	× \$80 =	\$0.00
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS (If applicable)			+ \$270 =	\$0.00
<input checked="" type="checkbox"/> LATE FILING OF DECLARATION			+ \$130 =	\$130.00
BASIC FEE				\$710.00
TOTAL OF ABOVE CALCULATIONS				\$930.00
<input type="checkbox"/> REDUCTION BY 50% FOR FILING BY SMALL ENTITY				\$0.00
<input type="checkbox"/> FILING IN NON-ENGLISH LANGUAGE			+ \$130 =	\$0.00
<input type="checkbox"/> RECORDATION OF ASSIGNMENT			+ \$40 =	\$0.00
TOTAL				\$930.00

- ☐ Please charge Deposit Account No. 15-0030 in the amount of _____ A duplicate copy of this sheet is enclosed.
- ☒ A check in the amount of **\$930.00** to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge any additional fees which may be required for the papers being filed herewith and for which no check is enclosed herewith, or credit any overpayment to Deposit Account No. 15-0030. A duplicate copy of this sheet is enclosed.

Respectfully Submitted,

OBLON, SPIVAK, McCLELLAND,
MAIER & NEUSTADT, P.C.



Norman F. Oblon
Registration No. 24,618

William E. Beaumont
Registration No. 30,996

Date: OCTOBER 20, 2000

Tel. (703) 413-3000
Fax. (703) 413-2220
(OSMMN 10/00)



22850

f:\atty\WEB\198707US-8958.fee.wpd

198707US-0X CONT

IN THE UNITED STATES PATENT & TRADEMARK OFFICE

IN RE APPLICATION OF: :
Johannes KRUL ET AL : GROUP ART UNIT: UNKNOWN
SERIAL NO: NEW APPLICATION :
FILED: HEREWITH : EXAMINER: UNKNOWN
FOR: SUBSTRATE WHICH IS MADE FROM
PAPER AND IS PROVIDED WITH AN
INTEGRATED CIRCUIT

PRELIMINARY AMENDMENT

ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

SIR:

Prior to examination on the merits, please amend this application as follows.

IN THE SPECIFICATION

Page 1, at the top of the page, delete "994028/US/JV/MHO", and insert therefor
- TITLE OF THE INVENTION - ;

under the title, delete

"CROSS-REFERENCE TO RELATED APPLICATIONS";

above line 5, insert:

- BACKGROUND OF THE INVENTION - ;

line 5, delete

"FIELD OF THE INVENTION" and insert therefor

- Field of the Invention - ;

line 9, delete

"BACKGROUND OF THE INVENTION" and insert therefor

- Description of the Background- -.

Page 3, line 31, delete "EMBODIMENT" and insert therefor - EMBODIMENTS- -.

IN THE CLAIMS

Claim 1, line 1, delete "Substrate" and insert therefor - A substrate- -.

Claims 2-13, line, delete "Substrate" and insert therefor - The substrate- -.

Claim 14, line 1, delete "Security" and insert therefor - A security- -.

Claim 15, line 1, delete "Security" and insert therefor - A security- -.

Claim 16, line 1, delete "Security" and insert therefor - A security- -.

Claim 17, line 1, delete "Optically" and insert therefor - An optically- -.

Please add the following new Claims:

- 18. The substrate according to Claim 1, which further comprises polyimide having polyaniline blocks thereon underneath said semiconductive organic polymer.

19. The substrate according to Claim 1, which further comprises an insulating layer on said semiconductive organic polymer.

20. The substrate according to Claim 1, having an uppermost layer of polyaniline.

21. The substrate according to Claim 1, wherein the paper has a thickness up to 100 μ m.

22. The security paper according to Claim 14, which is a banknote.

23. The security document according to Claim 15, which is a passport.

24. The security document according to Claim 15, which is an identity card.

25. The security document according to Claim 15, which is a security.- -

REMARKS

Claims 1-17 have been amended. New Claims 18-25 have been added. Hence, Claims 1-25 are now active in this case.


Applicants have amended the claims to clarify the present invention. All of the above amendments are supported by the claims and disclosure as originally filed. No new matter has been added.

Accordingly, it is believed that the present application is now in condition for examination on the merits.

Favorable consideration is earnestly solicited.

Respectfully submitted,

OBLON, SPIVAK, McCLELLAND,
MAIER & NEUSTADT, P.C.



Norman F. Oblon
Attorney of Record
Registration No. 24,618

William E. Beaumont
Registration No. 30,996



22850

PH: (703) 413-3000
FX: (703) 413-2220
NFO/WEB/sej

I:\atty\WEB\198707US-8958.am.wpd

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

IN RE APPLICATION OF: Johannes KRUL ET AL

FILING DATE: Herewith

FOR: SUBSTRATE WHICH IS MADE FROM PAPER AND IS PROVIDED WITH AN INTEGRATED CIRCUIT

LIST OF INVENTORS' NAMES AND ADDRESSES

ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

SIR:


Listed below are the names and addresses of the inventors for the above-identified patent application.

- | | |
|-------------------------------|--|
| 1)Johannes KRUL | 117, Meerkoetlaan, 6641 ZB BEUNINGEN, THE
NETHERLANDS |
| 2) Wilhelm Bernardus de HESSE | 20, Parkelerweg, 7391 ET TWELLO, THE NETHERLANDS |

A declaration containing all the necessary information will be submitted at a later date.

Respectfully Submitted,

OBLON, SPIVAK, McCLELLAND,
MAIER & NEUSTADT, P.C.



Norman F. Oblon
Registration No. 24,618

William E. Beaumont
Registration No. 30,996

I:\atty\WEB\198707US-8958.list-inv.wpd

Tel. (703) 413-3000
Fax. (703) 413-2220
(OSMMN 11/98)



22850

SUBSTRATE WHICH IS MADE FROM PAPER AND IS PROVIDED WITH AN INTEGRATED CIRCUIT.

CROSS-REFERENCE TO RELATED APPLICATIONS

This is a continuation application of PCT/NL99/00220, filed on April 15, 1999.

5 FIELD OF THE INVENTION

The invention relates to a substrate which is made from paper and is provided with at least one integrated circuit.

BACKGROUND OF THE INVENTION

10 A substrate of this nature is known from German Patent Application DE-196 01 358, and is used in security documents and banknotes to protect against forgery and fraud. This known substrate comprises an integrated circuit which is incorporated in the substrate and contains predetermined data.

15 The IC is contactlessly readable and is joined to the substrate in a non-releasable manner. The IC which is used in this substrate is a conventional IC, i.e. of the well-known silicon type. The dimensions of the chip originally produced are reduced by means of etching or polishing, so that the chip acquires the

20 thickness which is desired for it to be incorporated in the paper mass. In order to prevent damage to the crystalline circuits, the IC is reinforced with the aid of a support layer, which also serves to position the IC. Furthermore, the IC is covered with a protective, chemically resistant layer. The lack

25 of flexibility of this known silicon chip is a drawback when a substrate of this nature is used as a security paper, for example in banknotes and identity documents. In addition, the extra layers which are to be included, as well as the additional processing step for producing the appropriate dimensions, lead

30 to an additional increase in the cost price of a substrate of this nature.

The object of the present invention is to provide a paper-based substrate for use in security documents, banknotes

and the like, in which an integrated circuit is incorporated, which substrate does not have the drawbacks mentioned above.

SUMMARY OF THE INVENTION

5 According to the present invention, this object is achieved with a substrate of the type mentioned above in which the integrated circuit comprises a semiconductive organic polymer. This means an electronic circuit which is arranged in the polymer material and the contents of which are programmed in
10 order to assign it a specific function. Polymer chips of this nature are highly flexible and are therefore eminently suitable for use in security documents such as banknotes. Even sharp creases in the chip made from a semiconductive organic polymer do not impede the functioning of the chip. In addition, poly-
15 meric ICs can be produced directly in the desired dimensions, in particular with regard to thickness, and the costs of a chip of this nature are lower by approximately a factor of 10 than the current lowest price for a chip of the silicon type.

 In the polymeric chip, the nonconductive support on
20 which the semiconductive polymer material is deposited substantially determines the thickness of the overall integrated circuit. It is preferable to use a mechanically strong insulator: plastics with strong intramolecular and intermolecular interactions are particularly suitable for this purpose.

25 Using an IC of this nature as a security mark in security paper and similar items provides novel and powerful means of protection, since producing these ICs is much too complicated for forgers and generally far exceeds their knowledge and capabilities.

30 In the context of this application, paper is understood to mean paper which is made from natural or synthetic fibres, as well as "paper" which can nowadays be produced from plastic films, which paper is used for the production of security paper, banknotes and the like.

35 The integrated circuits may number one or more and may be adjusted as a function of the requirements. For example, with a view to certainty of operation, it is possible to incorporate two or more identical polymer chips, so that in the event of one of these chips failing the substrate and/or the end

product which has been produced therefrom can still be used.

BRIEF DESCRIPTION OF THE DRAWINGS

To illustrate the invention further, reference is
5 made to the appended drawing, in which:

Fig. 1 shows a diagrammatic plan view of an embodiment of a banknote according to the invention;

Fig. 2 shows a cross section through the banknote illustrated in Fig. 1, along line I-I;

10 Fig. 3 shows a diagrammatic plan view of another embodiment of a banknote according to the invention;

Fig. 4 shows an enlarged illustration of an optically active element which is used in the banknote in accordance with Fig. 3;

15 Fig. 5 shows a cross section through the optically active element illustrated in Fig. 4;

Fig. 6 shows a cross section through yet another embodiment of a banknote according to the invention;

20 Fig. 7 shows a further embodiment of a security thread with polymeric chip;

Fig. 8 shows another embodiment of an optically active element with polymeric chip;

Fig. 9 shows a combination of a security thread and optically active element; and

25 Fig. 10 shows yet another embodiment of a security thread according to the invention, in cross section.

It should be noted that, in the figures which are to be discussed below, identical components are denoted by identical reference numerals.

30

DESCRIPTION OF THE PREFERRED EMBODIMENT

Preferably, the organic polymer is selected from conjugated polymers, in particular from oligomeric pentacene, poly(thienylene vinylene) or poly-3 alkylthiophene. An IC which
35 is produced from one of these materials is described by Brown et al. in Science, 270, pp. 972-974, 1995.

As will be understood by the skilled person, the plastic IC, used in the invention, comprises additional layers of different polymers besides the semiconductive polymer layer.

For example, the substrate may be produced from polyimide, on which polyaniline blocks are formed, which function as source and drain. On top thereof, the semiconductive polymer layer is present, e.g. comprising poly(thienylene vinylene). This layer is covered by an insulating layer, e.g. from polyvinylphenol, while a top layer of polyaniline is the uppermost layer, which is the gate.

In an embodiment of the substrate according to the invention, the integrated circuit is contactlessly readable, the data transmission being brought about by an inductive or capacitive route, as is known in the prior art.

In case of inductive readout a coil is needed for the current supply, which has to be connected conductively to the IC; thereby making possible readout from a distance. In order to be able to readout at a small distance it is necessary that the IC contacts a conductor, wherein this conductor together with the measuring apparatus creates a capacity, whereby the current supply and readout become possible.

According to another preferred embodiment of the substrate according to the invention, the substrate comprises a conductive security thread which is connected to the integrated circuit, which security thread serves as a direct contact or indirect contact for the readout and for supplying the current. In a preferred embodiment thereof, the security thread is metallized in order to provide the required electrical conductivity, except at the position of the polymeric IC, where the deposition of metal is interrupted. In the case of direct current supply the metal has to be accessible. Possible ways of providing this accessibility comprise a security thread which is incorporated in the substrate, as well as a security thread which is incorporated in the substrate and the metal parts of which are accessible via so-called windows. Advantageously, one or more integrated circuits are part of the security thread itself. The thickness of this security thread may be adapted to the intended use of the substrate, for example in banknotes. For banknote paper, the thickness of the paper substrate usually lies in the range up to 100 μm . In this case, the thickness of the security thread preferably lies in the range of 15-60% of the thickness of this substrate. If the paper substrate has a

different thickness, as for example for a cover of an identity document such as a passport, a minimum thickness of the security thread of approximately 10 μm applies. A thickness greater than 100 μm is relatively meaningless for use in security paper. The preferred embodiment of a polymeric IC in the form of a security thread provides an additional security feature which can easily be recognized by the public. The thread comprising an integrated circuit may additionally comprise a number of other features, such as a dye, fluorescent or phosphorescent material, luminescent material and printed indices.

Organic, conductive polymers can also be used for supplying the current to the chip, although in case of direct contact the mechanical contact properties of these polymers currently still leave something to be desired.

A simple security thread which consists of conductive polymers is proposed in European Patent Application EP-A-0,753,623. However, a thread of this nature has only conductive properties. There are no semiconductor properties, and therefore it is not possible to apply and store a code in a manner which is comparable to a conductive polymer thread in which an integrated circuit is incorporated. The security thread comprising an integrated circuit according to the invention can be arranged in the customary way, for example by being incorporated completely or integrated in the paper mass, in a window or by being attached to the surface of a document. If protection against attack from chemicals is required, a chemically resistant, electrically nonconductive protective layer may be applied to the conductive organic polymers of the chip.

The polymeric chip does not per se have to be completely incorporated in the paper, as is the case for the silicon chip in the German patent application mentioned above. As an alternative, the polymeric IC may also be arranged on the surface of the substrate, using customary techniques for attaching foils, holograms, other optically active elements and the like.

The integrated circuit may also advantageously itself form part of all sorts of optically active elements, such as foils, patches, holograms or kinegrams, which are arranged on or in the substrate as additional security features. As has already

been described above with regard to a security thread, according to a further preferred embodiment it is also possible to shape optically active elements of this nature in such a manner that two electrically separate conductive parts of such elements function for readout and current supply, both directly and capacitively. The conductive parts may consist of metal, conductive polymer or a combination thereof.

For protection purposes, the integrated circuit may comprise a preprogrammed code, which code is applied before the chip is incorporated in the substrate.

Advantageously, the integrated circuit comprises a code of an intrinsic property of the substrate in which the circuit is incorporated.

In the current state of the art, the polymer IC may be used only in one direction; i.e. it can be written or programmed once. A preferred way of storing a code in the IC is to use techniques which are derived from cryptology. The authentic code is then stored in the IC in an encrypted manner, and deciphering is impossible without knowing the secret key. Thus, even if unwritten chips could be obtained illegally, the secret key forms a powerful and virtually impregnable barrier preventing the forger from applying a message to security documents and reading this message out. The protection can be improved still further if the optionally partial programming of the chip is carried out after the IC has become part of the security document, as will be explained in more detail below.

The shape of the polymer chip is not critical. Currently, a dimension of approximately 1 mm for a rectangular shape represents the lower limit of a surface dimension if a reasonable number of bits are to be stored in the IC. A rectangular IC of 4 mm by 6 mm currently holds approximately 48 bits, i.e. two bits/mm². The ratio of the surface dimensions for a polymer chip (i.e. length to width) should preferably not exceed 10:1, owing to the resultant undesirable build-up of the chip given larger ratios. The small dimensions of an IC offer the possibility of covering the chip with additional features which are customarily used in the prior art. The dimensions of such additional features are generally large compared to the dimensions of the polymeric IC. Thus even large ICs, with

sufficient memory capacity for storing large quantities of data, can be used without impairing the appearance of the security paper. If a combination of a chip with another security mark is arranged on the security paper, it is necessary to ensure that
5 reading and supplying current to the chip are not adversely affected by an additional security feature of this nature.

The substrate comprising a polymer IC according to the invention is used as a security paper in, for example, bank-
notes, passports, identity cards and other security documents,
10 such as securities.

The development of an inexpensive integrated circuit of this nature offers a number of novel possibilities for preventing forgery of security documents, beginning with a completely new type of electronics (electronic bar codes) in
15 security paper.

Examples of the use of an IC as a security feature in a document which will be described are the various possibilities for a banknote, but comparable possibilities likewise exist for other types of security documents, such as passports, identity
20 cards and the like.

A first possibility relates to the use of a completely preprogrammed IC in the substrate made from paper. The IC contains one or more codes, if desirable in encrypted form, relating to the banknote. This information may comprise
25 the value, the country, the place and/or time of production, number and the like. For a specific value of the banknote, the information on each chip is substantially identical, i.e. value, country and usually the paper manufacturer and/or printer, and partially different, i.e. production time, production numbers
30 and sometimes paper manufacturer and/or printer.

A more specific protection is obtained with a chip which is partially preprogrammed with a unique code (first code) and an additional second code. This second code is an encrypted translation of the first code. Encryption is carried out using a
35 first key. In the event of verification, the second code is read and the encrypted relationship to the first code is verified using a second key. The second code can be applied to the chip before or after the chip has been arranged in the substrate. An encryption system of this nature is described, by way of

example, in WO-A-97/24699.

In this known system, an intrinsic property of the object is coded, encrypted and enciphered. For banknotes, surface properties are taken at a special location, coded, encrypted and stored as a printed pattern on the banknote. In the event of verification, the printed pattern and the surface property are compared with one another using a second key.

Many other properties, as well as properties distributed arbitrarily in the substrate, are used in the prior art for the protection of security documents, cf., inter alia, WO-A-91/19614 (fibre direction), GB-A-230,407 (reflective flakes), US-A-4,218,764 (magnetic particles or fibres) and WO-A-87/01845 (conductive fibres). In all these cases, arbitrary and therefore unique properties of a document are used for the verification. Hitherto, there has been no suitable chip available for use in paper substrates in order to store the (encrypted) code, and consequently a coded property was always stored in another way, for example outside the document itself, or was printed in or on the document or recorded magnetically therein. The polymeric chip which is used in the substrate according to the invention makes it technically possible to use and store these protection features inside the document.

The fluorescence properties of arbitrarily distributed fluorescent fibres in a predetermined area of the banknote may be a suitable property. However, any other property which can be measured and is arbitrarily distributed in or on the paper may also be used. A condition is that the property used must be stable throughout the entire lifespan of the document, which means that any property which is highly dependent on the consequences of use, such as soiling, contamination, creasing and the like, is in principle unsuitable.

The coordinates of the relevant part of the banknote where the arbitrary property is determined and, if necessary, the orientation in which the surface must be examined may also be stored in the chip. Thus, when verifying the banknote, a specific parameter is measured along a predetermined path, or an image of the entire banknote is taken, but the assessment is carried out using only the data found at the precoded

coordinates. The result of this measurement is compared with the stored code, which likewise refers to the same property at the same location. On the basis of this comparison, which may optionally be encrypted, a rejection or acceptance signal is generated.

The substrate with a polymeric IC according to the invention may furthermore comprise customary security features, such as watermarks, security threads, optically active elements and special chemicals, microprints, etc., standard techniques being used to determine these features.

The invention also relates to a security thread or optically active element comprising an integrated circuit made from a semiconductive organic polymer.

The following example illustrates the invention. In this case, specific fluorescent properties in a specific part of the document are used as an example. Many banknotes are supplied with a number of highly fluorescent fibres which emit different colours of light. These fibres are distributed arbitrarily through the document. The local fluorescence of various types of fibres at a predetermined location can be coded and digitally stored in the chip, optionally in encrypted form, at the time the document is produced, i.e. during the paper manufacturing phase or during the document printing phase. In the event of verification, the area in question is read again using the coordinates and orientation which are stored in the chip, and the results are compared with one another, followed by rejection or acceptance. The said coordinates and orientation will generally differ for each separate banknote, with the result that verification is completely unique for the said document, since the arbitrary property and coordinates are unique for that document. In this way, the chip of each separate banknote contains a unique code which, as it were, represents a fingerprint of a specific part of the banknote in question. The code of the intrinsic property may be stored either in encrypted or nonencrypted form.

As has already been mentioned above, the use of the substrate according to the invention is not limited to banknotes. For other uses, such as passports and identity documents, part of a biometric property of the legal owner can be used to

generate a digital code which is then stored in the IC of the document. One such example could be a coded part of a digitized photograph of the legal owner, the part to be digitized being determined by coded parameters which are unique for each document. Entirely as for the example given above, verification of the document requires the stored code of the photograph and the code actually read to match one another. Other biometric parameters may also be used, such as fingerprints or parts thereof, which are then stored in coded form in the polymer chip. Here too, it is necessary for the coded, stored feature to be stable.

Fig. 1 shows a banknote 1 made from paper. The banknote 1 comprises a security thread 2 containing a chip 3 made from a semiconductive organic polymer and conductive e.g. metallized parts 4. Furthermore, the banknote 1 comprises a second chip 3', which is likewise made from a semiconductive organic polymer. As can be seen from the cross section in accordance with Fig. 2, the security thread 2 is arranged on the paper 5, while the second polymeric chip 3' is embedded in the paper mass 5. The embedded chip 3' makes contact with a conductor or coil so as to provide the current required and readout.

Fig. 3 shows another embodiment of a banknote 1, in which the security thread 2, which again contains a polymeric chip and conductive parts 4, is incorporated in the paper mass. Sections of the conductive parts 4 are accessible via windows 6 in order to make direct electrical contact, if desired. The banknote 1 illustrated in Fig. 3 also comprises a second chip 3', which in this case is situated beneath an optically active element 7. The optically active element 7 comprises conductive parts 8 which are separated by a strip 9 which is insulating, i.e. nonconductive. The chip 3' can be read and supplied with power via the conductive parts 8, whether directly or from a distance via capacitive coupling. The conductive part may be covered by a chemically inert layer, if readout is done capacitively. If direct contact is required, a part of the conductor and the entire part 9 can be covered in such a way that the IC and conductor are protected (with a nonconducting material), while other parts of the conductor are still accessible to direct contact.

Fig. 4 shows an enlarged view of the optical element 7 with chip 3', while Fig. 5 is a cross section through an optical element 7 of this nature.

Fig. 6 shows a further embodiment of a security thread 2 with a chip made from semiconductive organic polymer 3 and conductive parts 4, which is applied on the paper 5. In this embodiment, the polymer chip and sections of the conductive parts 4 of the security thread 2 are protected by means of a layer 10 of a chemically resistant, electrically nonconductive material. The protecting layer 10 may cover the entire thread, if capacitive coupling is used.

Fig. 7 shows yet another embodiment of a security thread according to the invention, in which the chip 3 does not form part of the security thread itself, but rather is positioned next to it. The conductive parts 4 of the security thread 2 are electrically insulated from one another by means of insulator block 4. The chip 3 is connected to the relevant conductive parts 4 of the security thread via electrical conductors 12.

An embodiment of the same type for an optically active element is illustrated in Fig. 8. The electrical conductors 12 provide the electrical contact between the conductive parts 8 of the optically active element and the polymeric chip 3'.

Fig. 9 shows a combination of a security thread 2 with optically active element 7, the metal parts 4 of the security thread 2 making electrical contact with the metal parts 8 of the optically active element 7. A chip made from semiconductive organic material 3' is situated beneath the optically active element 7.

Fig. 10 illustrates yet another embodiment of a security thread according to the invention. In this embodiment, the security thread is composed of a chip 3 and conductive parts 13, which are made from a conductive polymer. The security thread is arranged on the paper 5. The polymer chip 3 is protected with a layer 10 of chemically resistant material, which also covers (sections of) the conductive polymer 13. In order to ensure a very good supply of power and readout, metal blocks 14 are arranged next to the layer 10 of insulating material, which

metal blocks 14 are electrically connected to the conductive organic polymers 13.

In case of a system using capacitive coupling an additional protecting layer may be applied over the metal parts
5 14 and the chemically resistant layer 10.

WHAT IS CLAIMED IS:

1. Substrate which is made from paper and is provided with at least one integrated circuit, wherein the integrated circuit is flexible and comprises a semiconductive organic polymer.
- 5 2. Substrate according to claim 1, wherein the organic polymer is selected from conjugated polymers.
3. Substrate according to claim 1, wherein the organic
10 polymer is selected from oligomeric pentacene, poly(thienylene vinylene) or poly-3 alkylthiophene.
4. Substrate according to claim 1, wherein the
15 integrated circuit is a contactlessly readable IC which can be read in an inductive or capacitive manner.
5. Substrate according to claim 1, wherein the substrate
20 comprises a conductive security thread which is connected to the integrated circuit or circuits, which security thread serves as a contact for readout operations and for current supply.
6. Substrate according to claim 5, wherein the
integrated circuit forms part of the security thread.
- 25 7. Substrate according to claim 5, wherein the security thread has a thickness which lies in the range of from 5-60% of the thickness of the substrate.
8. Substrate according to claim 1, wherein the
30 integrated circuit forms part of an optical active element, such as a foil, hologram or kinegram.
9. Substrate according to claim 1, wherein the
35 integrated circuit comprises a preprogrammed code which is applied before incorporating the circuit in the substrate.
10. Substrate according to claim 1, wherein the

integrated circuit comprises a code of an intrinsic property of the substrate, which code, after the substrate has been produced, is arranged in the integrated circuit.

- 5 11. Substrate according to claim 9, wherein the code is an encrypted code.
12. Substrate according to claim 1, wherein the substrate comprises additional security features.
- 10 13. Substrate according to claim 12, wherein an additional security feature is selected from a dye, fluorescent material, luminescent material or phosphorescent material.
- 15 14. Security paper comprising a substrate according to claim 1.
15. Security document comprising a substrate according to claim 1.
- 20 16. Security thread comprising an insulating support bearing a flexible integrated circuit comprising a semiconductive organic polymer, provided with electrical contacts for the integrated circuit.
- 25 17. Optically active element comprising a flexible integrated circuit comprising a semiconductive organic polymer, provided with electrical contacts for the integrated circuit.

ABSTRACT OF THE DISCLOSURE

The invention relates to a substrate which is made from paper and is provided with at least one integrated circuit which is produced from a semiconductive organic polymer. A semiconductive organic polymer of this nature, when used as the
5 base material for the integrated circuit, leads to the possibility of directly producing the substrate in the required thickness, to the need for support layers and/or protective layers being eliminated, and to the possibility of reducing the cost price of the substrate compared to substrates which comprise an
10 integrated circuit of the silicon type.

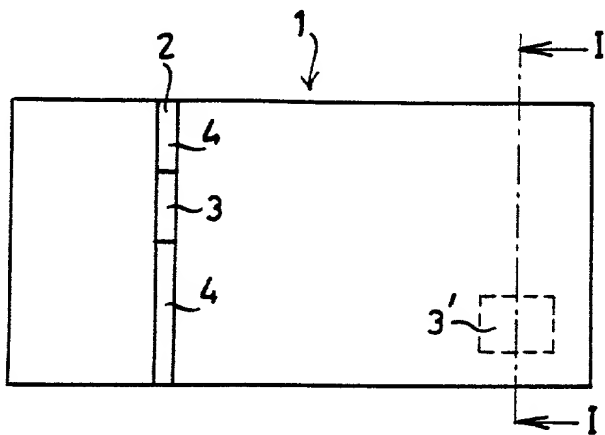


FIG. 1.




FIG. 2.

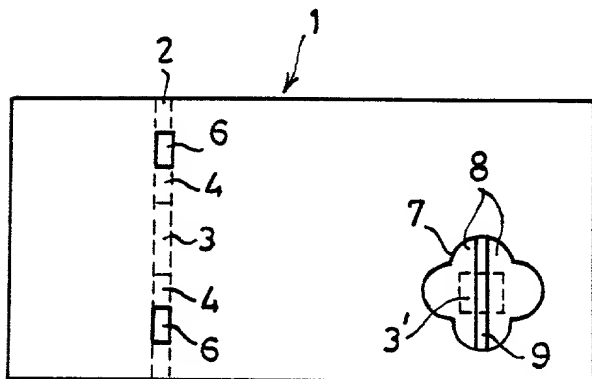


FIG. 3.

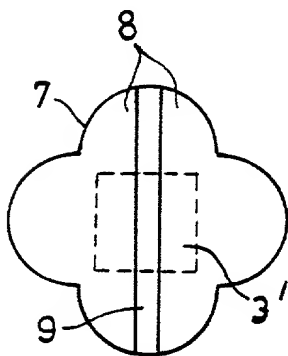


FIG. 4.

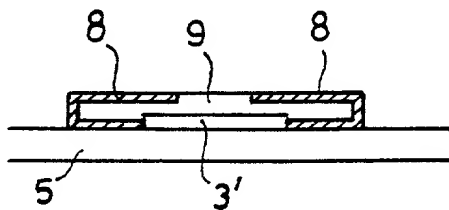


FIG. 5.

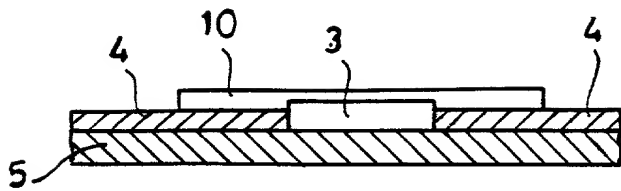


FIG: 6.

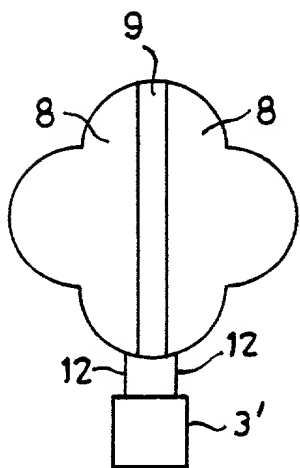


FIG: 8.

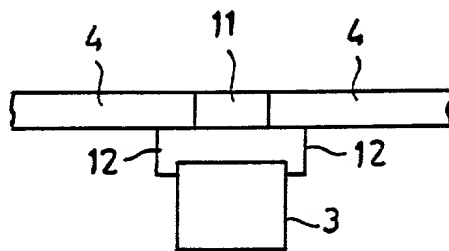


FIG: 7.

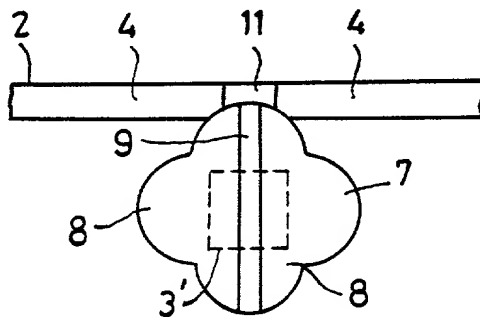


FIG: 9.

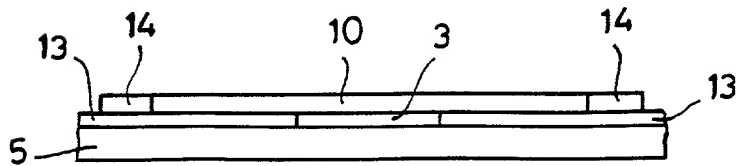


FIG: 10.